


MODULAR METERING ASSEMBLIES 120/240V
SINGLE PHASE

BY BH
DATE 10-9-03 SMTR-11
REV. _____ SHEET 1 OF 1

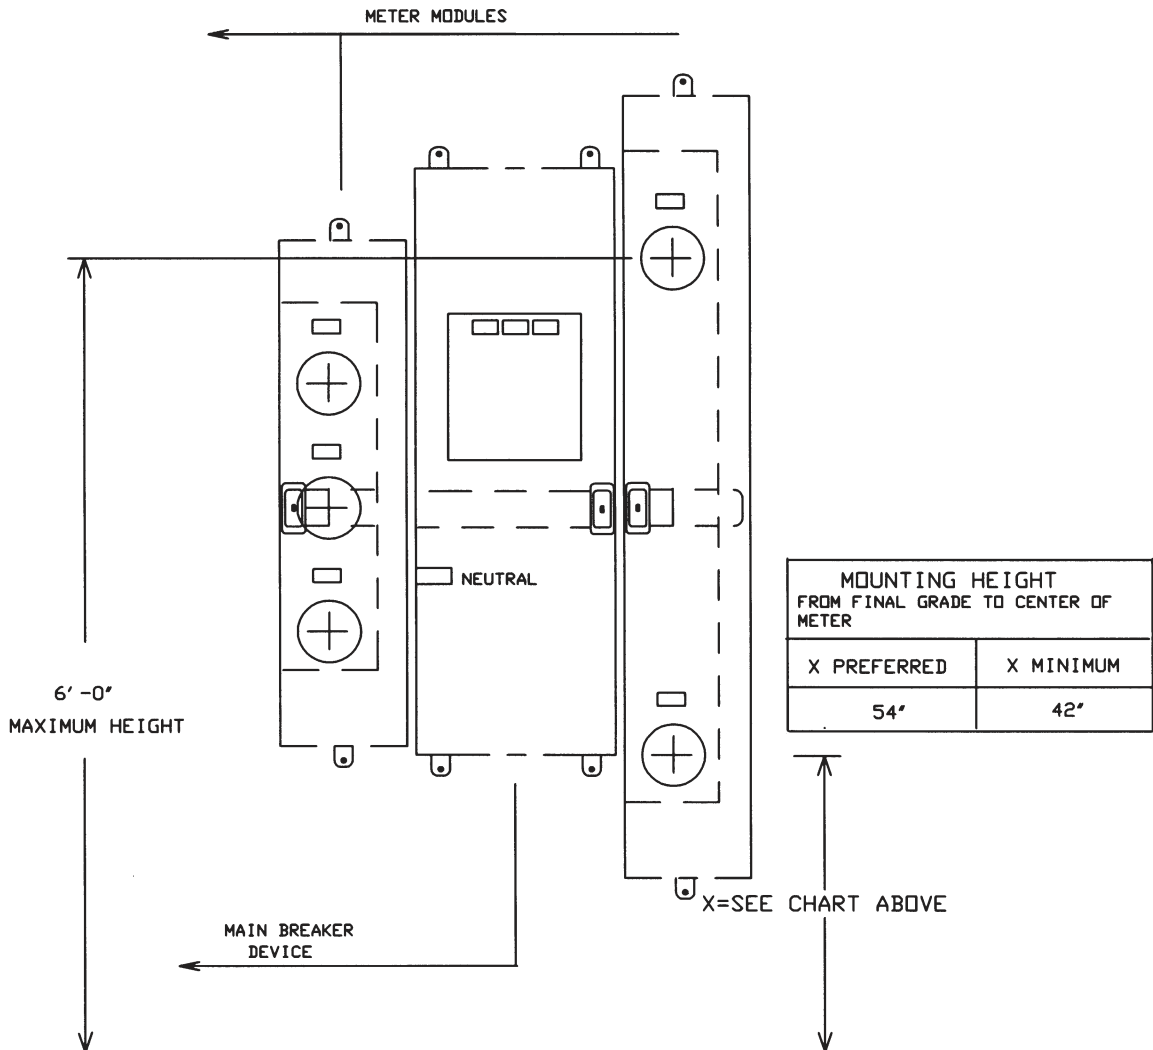

METER SOCKETS AND INSTALLERS TO BE IN COMPLIANCE WITH:
SCE&G "ELECTRIC SERVICE AND METER INSTALLATIONS", NEC, NESC AND
LOCAL CODES

NOTES:

- 1) CONTACT LOCAL SCE&G REPRESENTATIVE BEFORE INSTALLING METER INSTALLATIONS. CALL 1-800-251-7234 FOR A LISTING OF LOCAL OFFICES.
- 2) METER CENTERS MUST BE UL APPROVED AND LABELED, RINGLESS, INSTALLED LEVEL, PLUMB AND FASTENED SECURELY.
- 3) TERMINALS MARKED WITH THE APPROVED CONDUCTOR RANGE.
- 4) ALL UNUSED OPENINGS CLOSED AND WEATHER TIGHT.
- 5) SEPERATE SEALED COMPARTMENTS (BARRIER) FOR LINE AND LOAD SIDE WIRING
- 6) METER LUGS TO BE FURNISHED, INSTALLED AND MAINTAINED BY CUSTOMER (LOAD SIDE)
- 7) SOCKETS TO BE PERMANENTLY LABELED ON INSIDE OF METER SOCKETS AND COVERS AS TO THE UNITS THEY SERVE.

*ALL METER SOCKETS SUPPLIED BY THE CUSTOMER MUST BE APPROVED BY MATERIALS, EQUIPMENT & STANDARDS PRIOR TO ORDERING.

DISTRIBUTION CONSTRUCTION STANDARD
SOUTH CAROLINA ELECTRIC & GAS CO.